

Rack Mount Industrial Display Monitor

Model # RMB-19

Features

- Compact 19 inch rack mountable with 8U height
- 19 inch LCD panel, support 1280 x 1024 resolution
- DVI-D, VGA, Audio input
- 90 ° tilt adjustment while mounted in rack: 45° ~-45° (V)
- Heavy duty steel chassis with hardness glass protect screen
- Front osd control buttons to optimized display
- Build in 2x 2watts stereo speakers

Option

- Composite video input
- HDMI or Display port input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen



LCD Characteristics :

| | |
|-----------------------|-------------|
| Screen Size | 19 inch |
| Backlight Type | LED |
| Resolution | 1280x1024 |
| Contrast Ratio | 1000:1 |
| Brightness (cd/m2) | 350 |
| View Angles (H/V) | 170/160 |
| Pixel Size (HxV) mm | 0.294x0.294 |
| Max. Color | 16.7M |
| MTBF (Hrs.) | 50,000 |

Input Signals:

| | |
|------------------------|--------------------------------|
| DVI-D | DVI-D 24Pin Connector (Female) |
| VGA | D-SUB 15Pin Connector (Female) |
| Audio | 3.5" Jack |
| Power Input | Standard IEC Inlet |
| Touch-USB (option) | USB A Type connector |
| Touch-RS232 (option) | D-SUB 9P connector (Female) |

Power Specifications :


| | |
|--------------------------------------|---|
| AC Power Input | Standard IEC Type Power Cord with Internal Power adapter, 100-240V AC Input |
| Wide Range DC Power Input (option) | Screw Type Terminal Block with internal wide Range DC 9-36V power module |

User Controls Interface:

| |
|-----------------------------------|
| Power ON / OFF via Front Button |
| Power Mode Status LED indicator |
| OSD (On Screen Display) Buttons |

Mechanical and Environment:

| | |
|-----------------------------|------------------------------|
| Height | 8U |
| IP Protect | N/A |
| Mounting | VESA Mount and Rack Mount |
| Construction | Metal Housing |
| Operating Temperature | 0 - 50 deg. C |
| Operating Humidity | 5% - 95% (non -condensing) |
| Anti-Vibration | 5 - 500 Hz / 1 Grms PTP |
| Anti-Shock | 15G / Peak (11 ms) |
| Physical Dimension (WxHxD) | 483 x 355 x 60 (mm) |
| Packing Dimension (WxHxD) | 620 x 480 x 210 (mm) |
| Net Weight / Gross Weight | 10 / 12.5 (KGs) |
| Certification and Approvals | CE / FCC / RoHS |

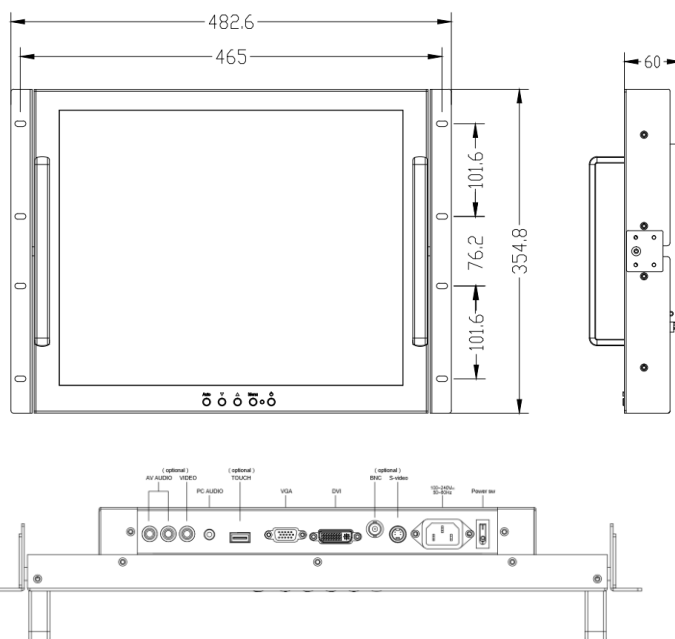

102 route de Limours - DOMAINE DE ST PAUL - BAT
A6 - Bureau 3
78470 ST REMY LES CHEVREUSE
Tel : 09 54 16 23 53 - Fax : 09 59 16 23 53
www.sacasa.info - contact@sacasa.info

