


Rack Mount Industrial Display Monitor

Model # RM-2x8

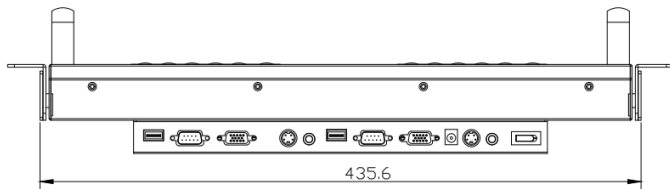

Features

- Compact 19 inch rack mountable with 4U height
- Dual 8 inch LCD panel, support 1024 x 768 resolution
- VGA, Composite Video Input
- 90 ° tilt adjustment while mounted in rack: 45° ~-45° (V)
- Heavy duty steel chassis with hardness glass protect screen
- Front osd control buttons to optimized display

Option

- BNC Loop-in-out
- HDMI input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen

LCD Characteristics :

Screen Size	8 inch
Backlight Type	LED
Resolution	1024x768
Contrast Ratio	700:1
Brightness (cd/m2)	300
View Angles (H/V)	150/150
Pixel Size (HxV) mm	0.05275x0.15825
Max. Color	RGB strip
MTBF (Hrs.)	50,000

Input Signals:

VGA	D-SUB 15Pin Connector (Female)
Composite Video	RCA plug
Audio	3.5" Jack
Power Input	External power adapter
Touch-USB (option)	USB A Type connector
Touch-RS232 (option)	D-SUB 9P connector (Female)

Power Specifications :


AC Power Input	100-240VAC / DC 12V external AC adapter
Wide Range DC Power Input (option)	Screw Type Terminal Block with internal wide Range DC 9-36V power module

User Controls Interface:

Power ON / OFF via Front Button
Power Mode Status LED indicator
OSD (On Screen Display) Buttons

Mechanical and Environment:

Height	4U
IP Protect	N/A
Mounting	Rack Mount
Construction	Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	5% - 95% (non-condensing)
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak (11 ms)
Physical Dimension (WxHxD)	483 x 186 x 64 (mm)
Packing Dimension (WxHxD)	600 x 190 x 320 (mm)
Net Weight / Gross Weight	7 / 8.5 (KGs)
Certification and Approvals	CE / FCC / RoHS

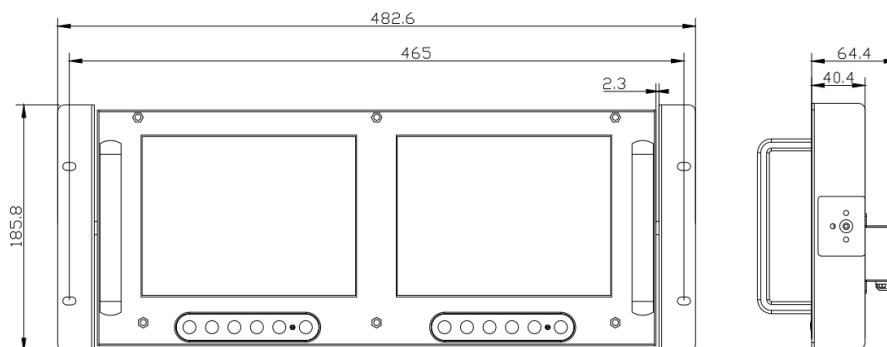

102 route de Limours - DOMAINE DE ST PAUL - BAT
A6 - Bureau 3
78470 ST REMY LES CHEVREUSE
Tel : 09 54 16 23 53 - Fax : 09 59 16 23 53
www.sacasa.info - contact@sacasa.info

