

Dual Vertical Screen LCD Console Drawers

Optimize rack space. Maximize rack monitoring

Dual Rail version

DVI-D-USB & VGA-USB , Audio , Hub




Features

- 2U dual vertical 19 inch LCD Console Drawer
- 2 gas struts to support LCD when open
- Dual DVI & VGA Port
- 1280 x 1024 resolution
- Dual rail design, capable the LCD screen and keyboard tray Operated independently.
- Front 1xUSB, Rear 2xUSB 2.0 Type A, Sharing USB peripheral Device for computer (ex, flash disk, hard driver, KB/Mouse)
- 104-key keyboard with touch pad mouse.
- USB 2.0 Keyboard & Mouse
- Build in 2x 2 watts speakers

Options

- Composite Video input
- HDMI or Display Port input
- 3G / HD / SD –SDI Broadcast grade input
- 48V, 24V or 12V DC Power

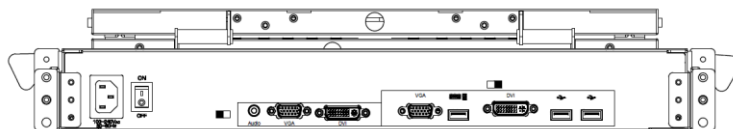

Rear of KVMD-19D2V

Part No.		KVMD-19D2V
No. of ports		1
KVM Connectors		2 x DVI-D & 2x VGA / 1 x USB for KB & Mouse / 1x Audio
LCD	Size	Dual 19 inch
	Backlight	LED
	Resolution	1280*1024
	Max.color	16.7M
	Luminance	250 cd/m2
	View Angel (H/V)	170 / 170
	Contrast Ratio	1000 : 1
Port Selection		N/A
USB HUB		Yes , Front x1 & Rear x 2 USB 2.0 Type A for USB Peripheral Device
Audio		1 x 3.5mm Audio jack
KB/Mouse Emulation		USB 2.0
Rack Depth (rack cabinet front rails to rear rails)		610mm to 940mm
Power		100-240V AC 50/60Hz via IEC Type power cord
Environment		Operation temp: 0 to 50 °C Storage temp: -20 to 60 °C Humidity: 10% - 90%, non-condensing Shock: 10G acceleration (11ms duration) Vibration: 17 to 500Hz 1G PTP
Physical Dimensions (W x H x D) / Net Weights (KGs)		443x87x609mm / 21.0
Packing Dimensions (W x H x D) / Gross weights (KGs)		700x600x240mm / 29.5
Accessory		
KVMD-19D2V	1.8meter IEC Type Power Cord x1 , 1.8meter DVI Cable x2 , 1.8meter VGA Cable x2 , 1.8meter USB Cable x1 ,1.8meter Audio Cable x1	

