


Rack Mount Triple LCD Drawer (screen pivot)

Model # RMD-24W-T3 / RMD-24WU-T3

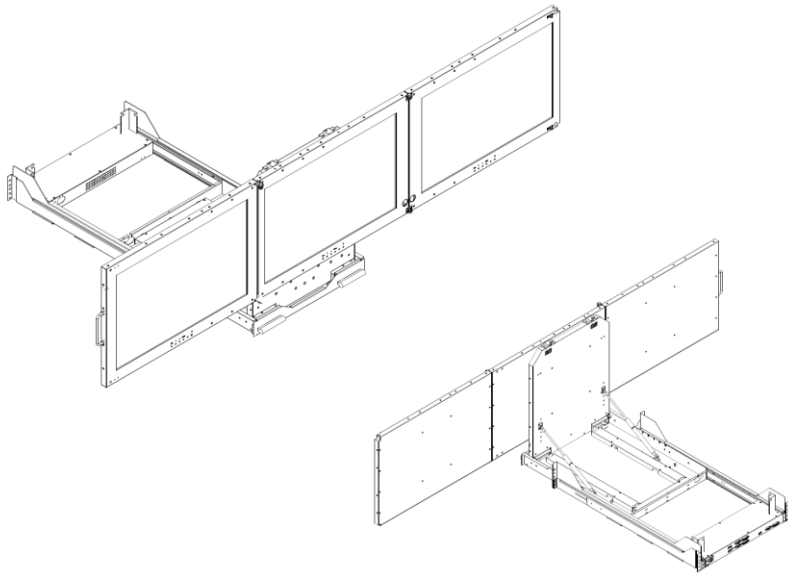

Features

- 2.5U foldable triple 23.8" or 24.1" widescreen LCD display Drawer
- Triple DVI & VGA Port
- native 1920 x 1080 FHD resolution (for 23.8")
- native 1920 x 1200 WUXGA Ultra high resolution (for 24.1")
- Build in 2x 2 watts speakers
- Independent front osd control buttons to optimized display

Option

- Composite video input
- HDMI or Display port input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen

LCD Characteristics :

Model NO.	RMD-24W-T3	RMD-24WU-T3
Screen Size	Triple 23.8"	Triple 24.1
Backlight Type	LED	LED
Native Resolution	1920 x 1080	1920 x 1200
Contrast Ratio	1000:1	1000:1
Brightness (cd/m2)	250	300
View Angles (H/V)	178/178	178/178
Pixel Size (HxV) mm	0.2745x0.2745	0.27x0.27
Max. Color	16.7M	16.7M

Input Signals:

DVI-D	Triple DVI-D 24Pin Connector (Female)
VGA	Triple D-SUB 15Pin Connector (Female)
Audio	1x 3.5" Jack
Power Input	Standard IEC Inlet
Touch-USB (option)	Triple USB A Type connector
Touch-RS232 (option)	Triple D-SUB 9P connector (Female)

Power Specifications :


AC Power Input	Standard IEC Type Power Cord with Internal Power adapter, 100-240V AC Input
Wide Range DC Power Input (option)	Screw Type Terminal Block with internal wide Range DC 9-36V power module

User Controls Interface:

Power ON / OFF via Front Button
Power Mode Status LED indicator
OSD (On Screen Display) Buttons

Mechanical and Environment:


Height	2.5U Foldable
Rack Depth	30" to 40" (cabinet front rail to rear rail)
Construction	Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	10% - 90% (non -condensing)
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak (11 ms)
Physical Dimension (WxHxD)	443 x 111 x 762 (mm)
Packing Dimension (WxHxD)	(mm)
Net Weight / Gross Weight	(KGs)
Certification and Approvals	CE / FCC / RoHs

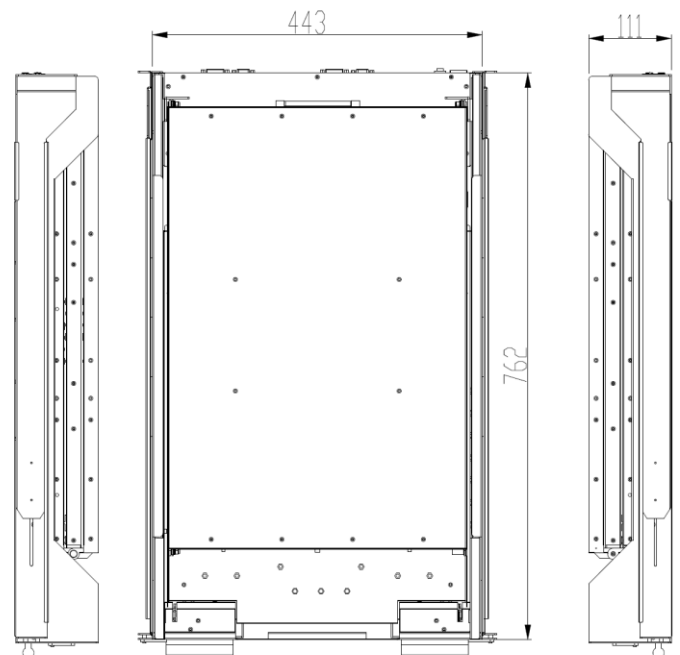

CE FC RoHS COMPLIANT

Rear of RMD-24W-T3/RMD-24WU-T3



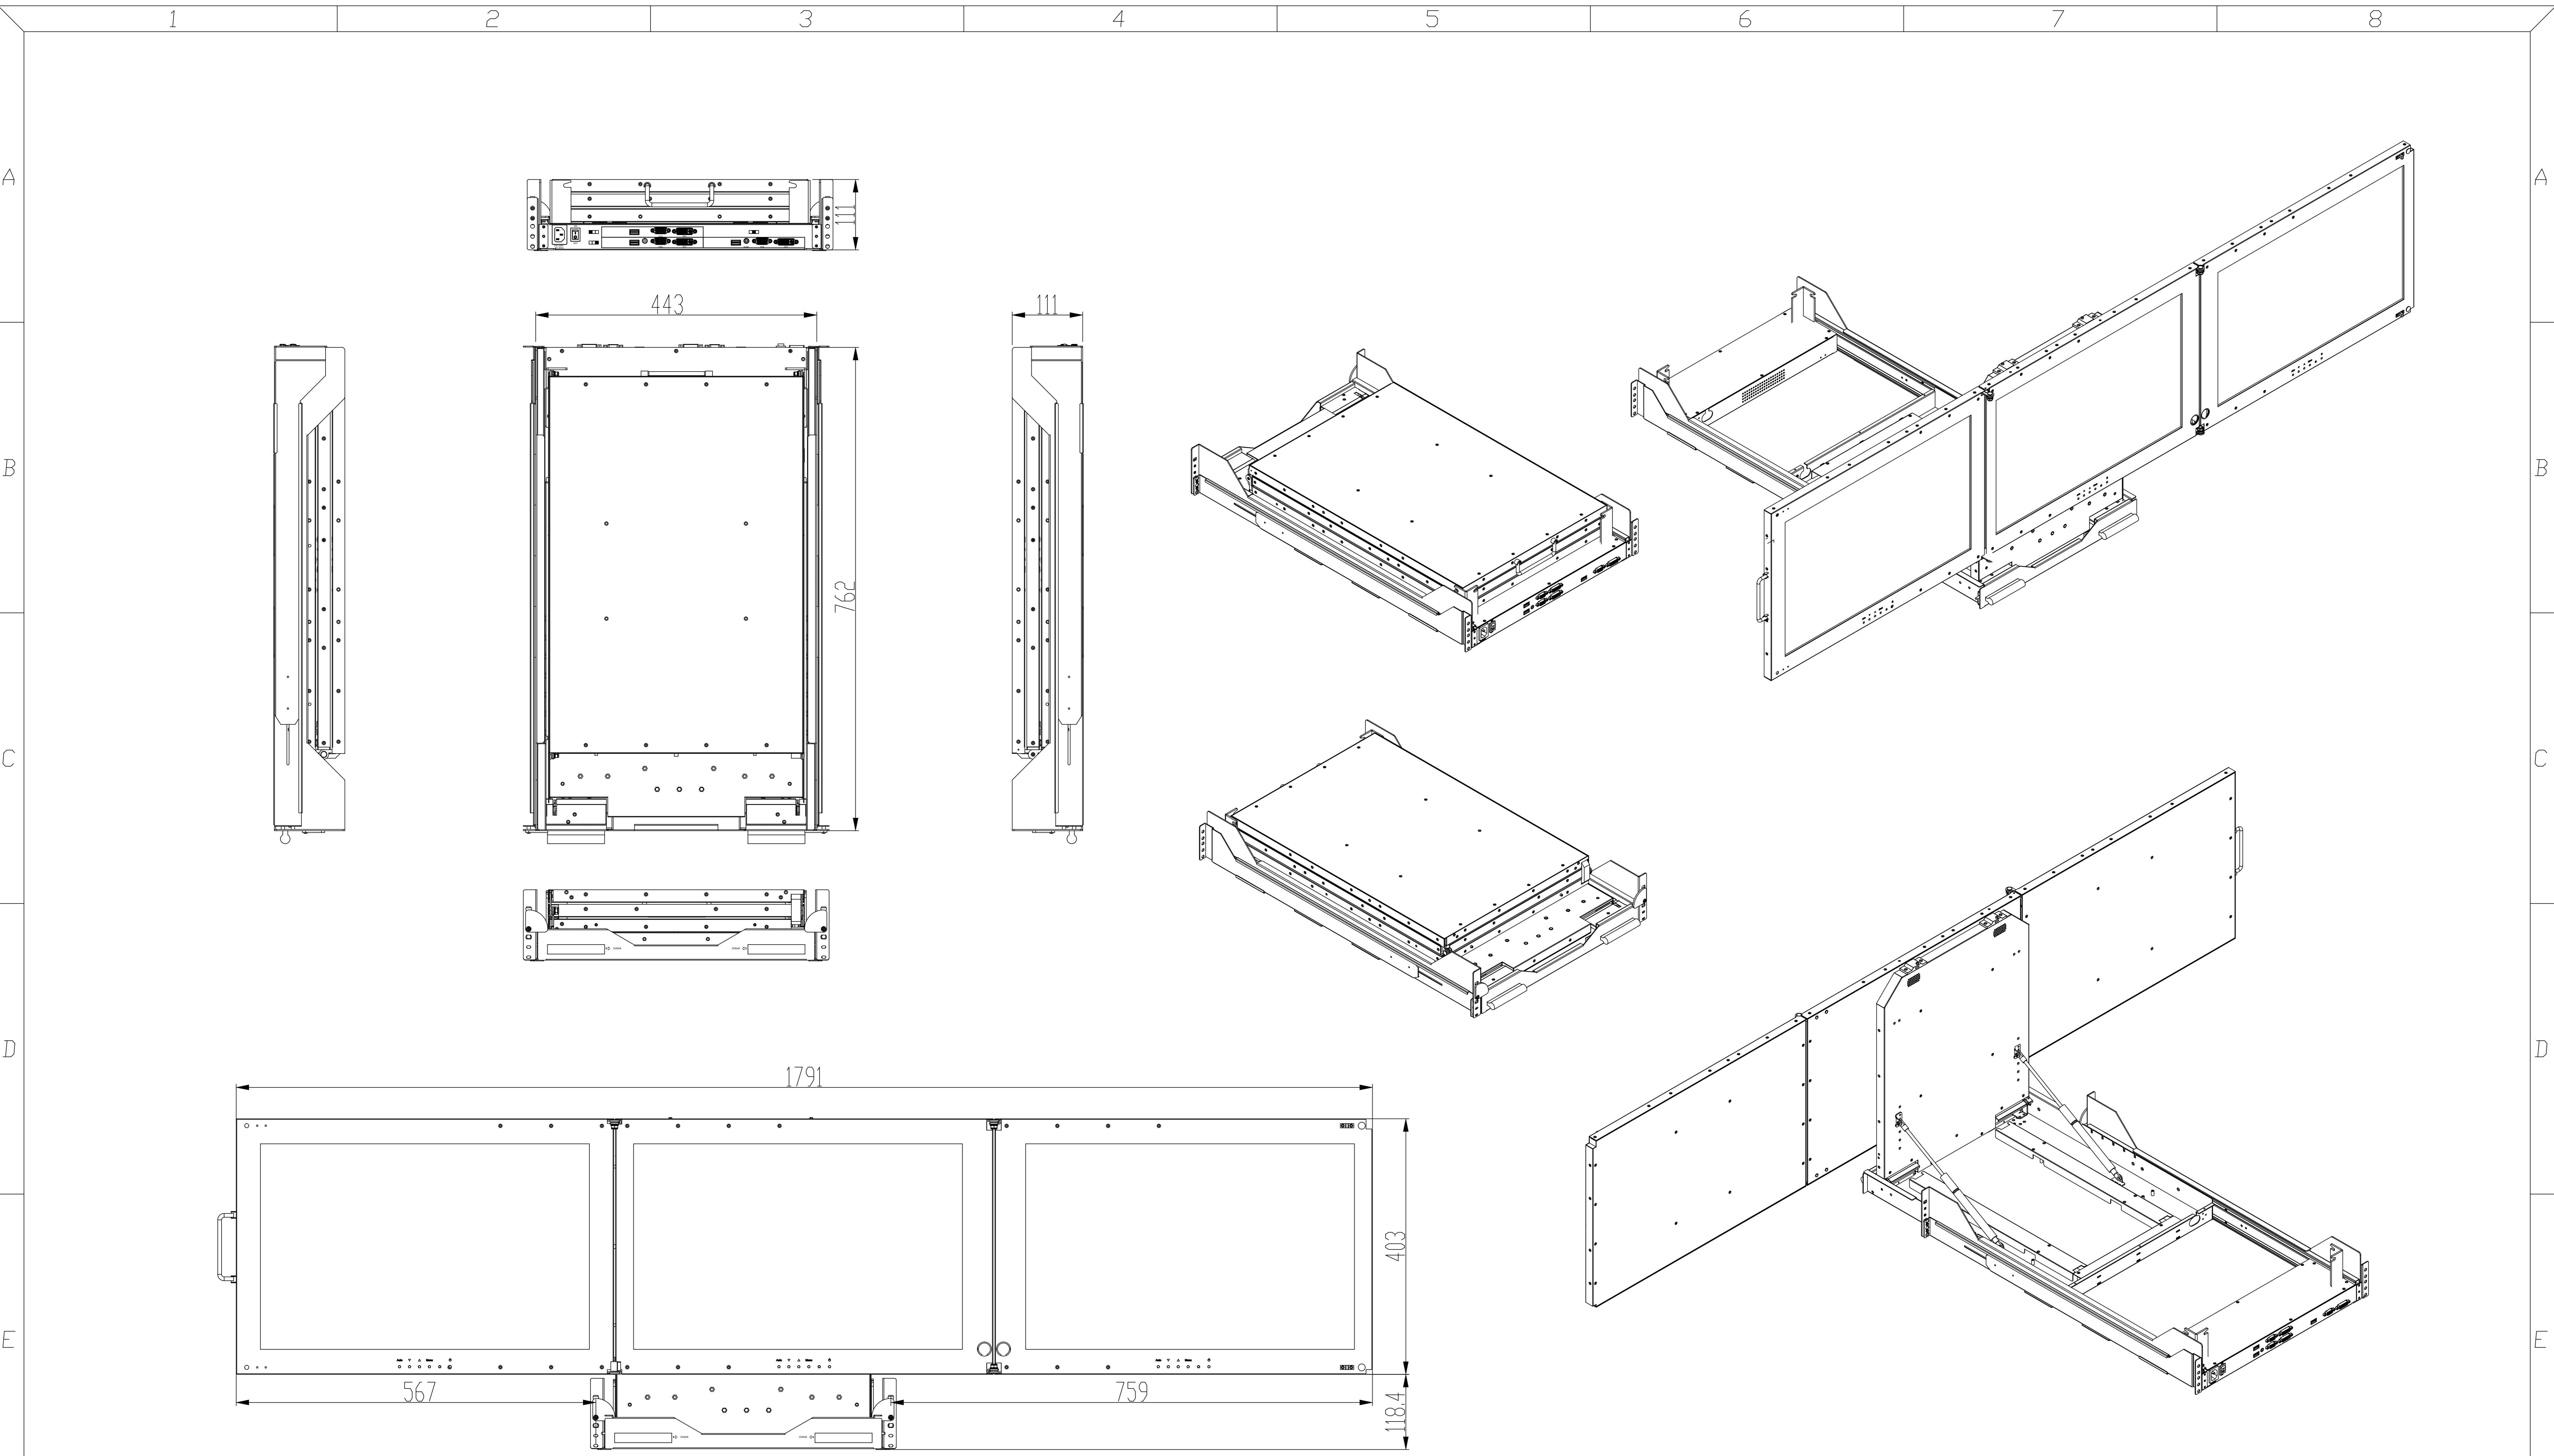

△			
△			
△			
MARK	DESCRIPTION	SING	DATE
1			2

毛边朝	1、绿色面	2、白色面									
TOL	< 30	:	±0.1	UNIT : mm	FINISHING		PART NO.	Ver.	A0		
	30 < 120	:	±0.15	3RD ANGLE'S	MATERIAL	SGCC T=1.0mm	MOLD NO.	RMD-24WT3	Q'ty	1	
	120 < 315	:	±0.2		APPROVED		TITLE	RMD-24WT3			
	315 <	:	±0.3		DESIGNED	LCH 2018-7-25	DRAWING NO.			△	
	ANGLE TOL	:	±0.5°		DRAWN		SIZE	A3	SCALE	0.125	SHEET: 1 OF 1