




## Features

- 8 Port DVI-D, USB, Audio KVM.
- DVI-D single link support resolution up to 1920x1200.
- USB local console.
- 2x USB 2.0 ports sharing USB peripheral for computers.
- Mixed PCs, SUNs & MACs with multi-platform switch Capability.
- Computer switching via push buttons, Hot keys.
- Hot pluggable, no software or driver required.
- Easy and quick installation.

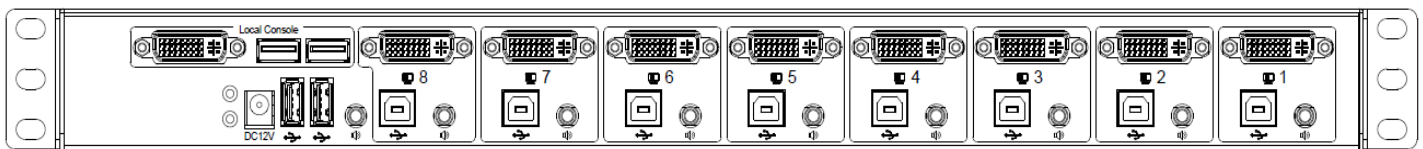

Rear of KDC-108

<b>Part No.</b>	<b>KDC-108</b>
No. of Computers	8
KVM port connector	DVI-D for Video USB 2.0 type B for KB/Mouse 3.5mm phone jack for Audio
Local Console	1x DVI-D for Video ( up to 1920x1200 resolution ) 2x USB Type A for KB / Mouse
USB HUB	2x USB 2.0 Type A for USB peripheral devices
Switching Port	Push button / Hot key
Compatibility	Mix PCs, SUNs and MACs, support Win7/Vista/2003/XP, Linux, Unix
Power	100-240V AC 50/60Hz external power adapter
Environment	Operation temp.: 0 to 50°C Storage temp : -20 to 60°C Humidity: 10% - 90%, non-condensing
Physical Dimensions /Net Weights	448mm (W) x 167mm (D) x 44mm (H) / 3kg
Packing Dimensions /Gross Weights	560*120*250mm / 3.5kg
<b>Relate Items</b>	
CD-018	1.8meter DVI Cable
CU-018	1.8meter USB Cable (Type A to Type B)
CA-018	1.8meter Audio Cable

1 2 3 4 5 6 7 8

A A

B B





C C

D D

E E

F F

1 2 3 4 5 6 7 8

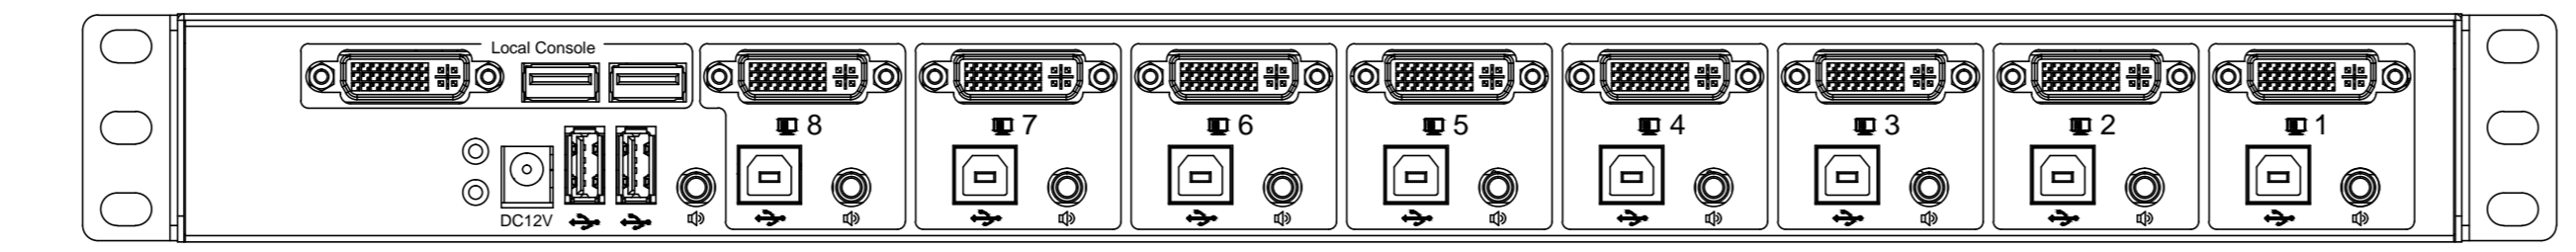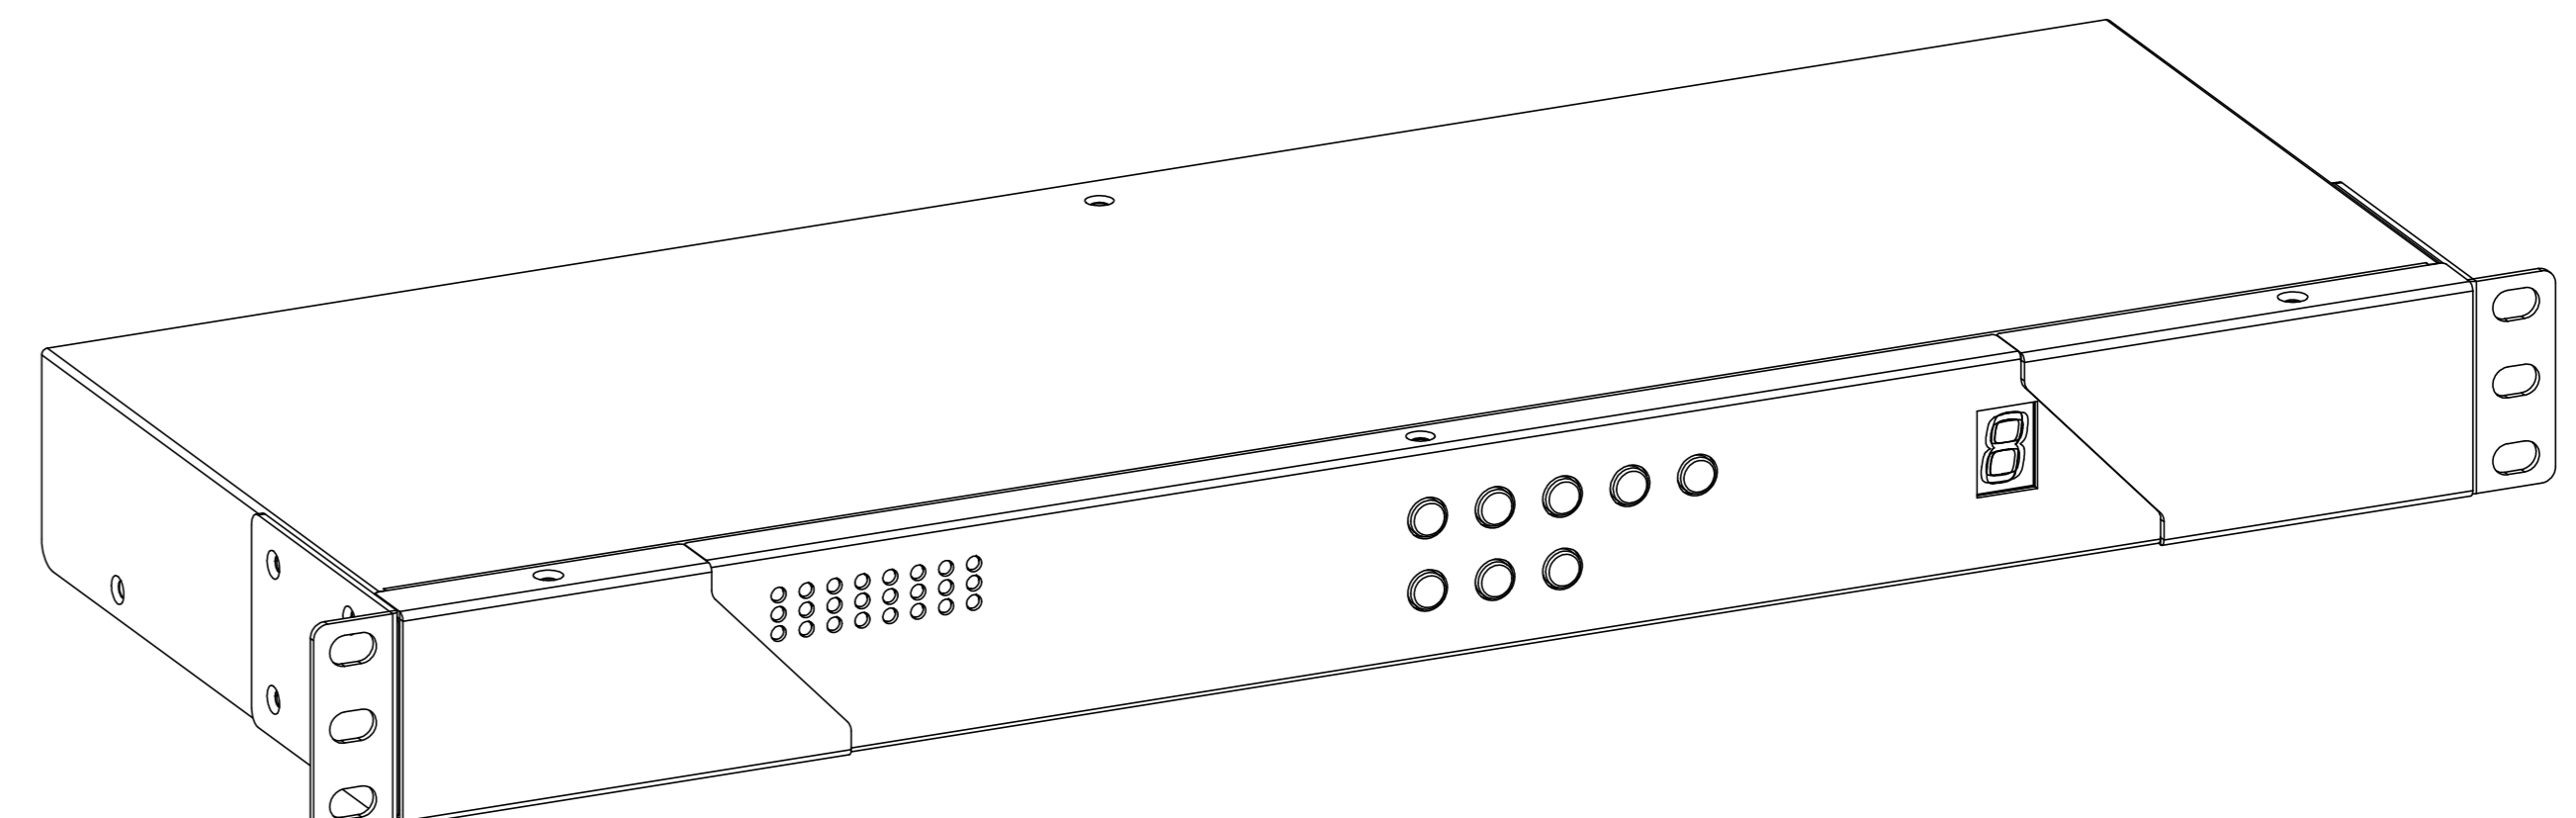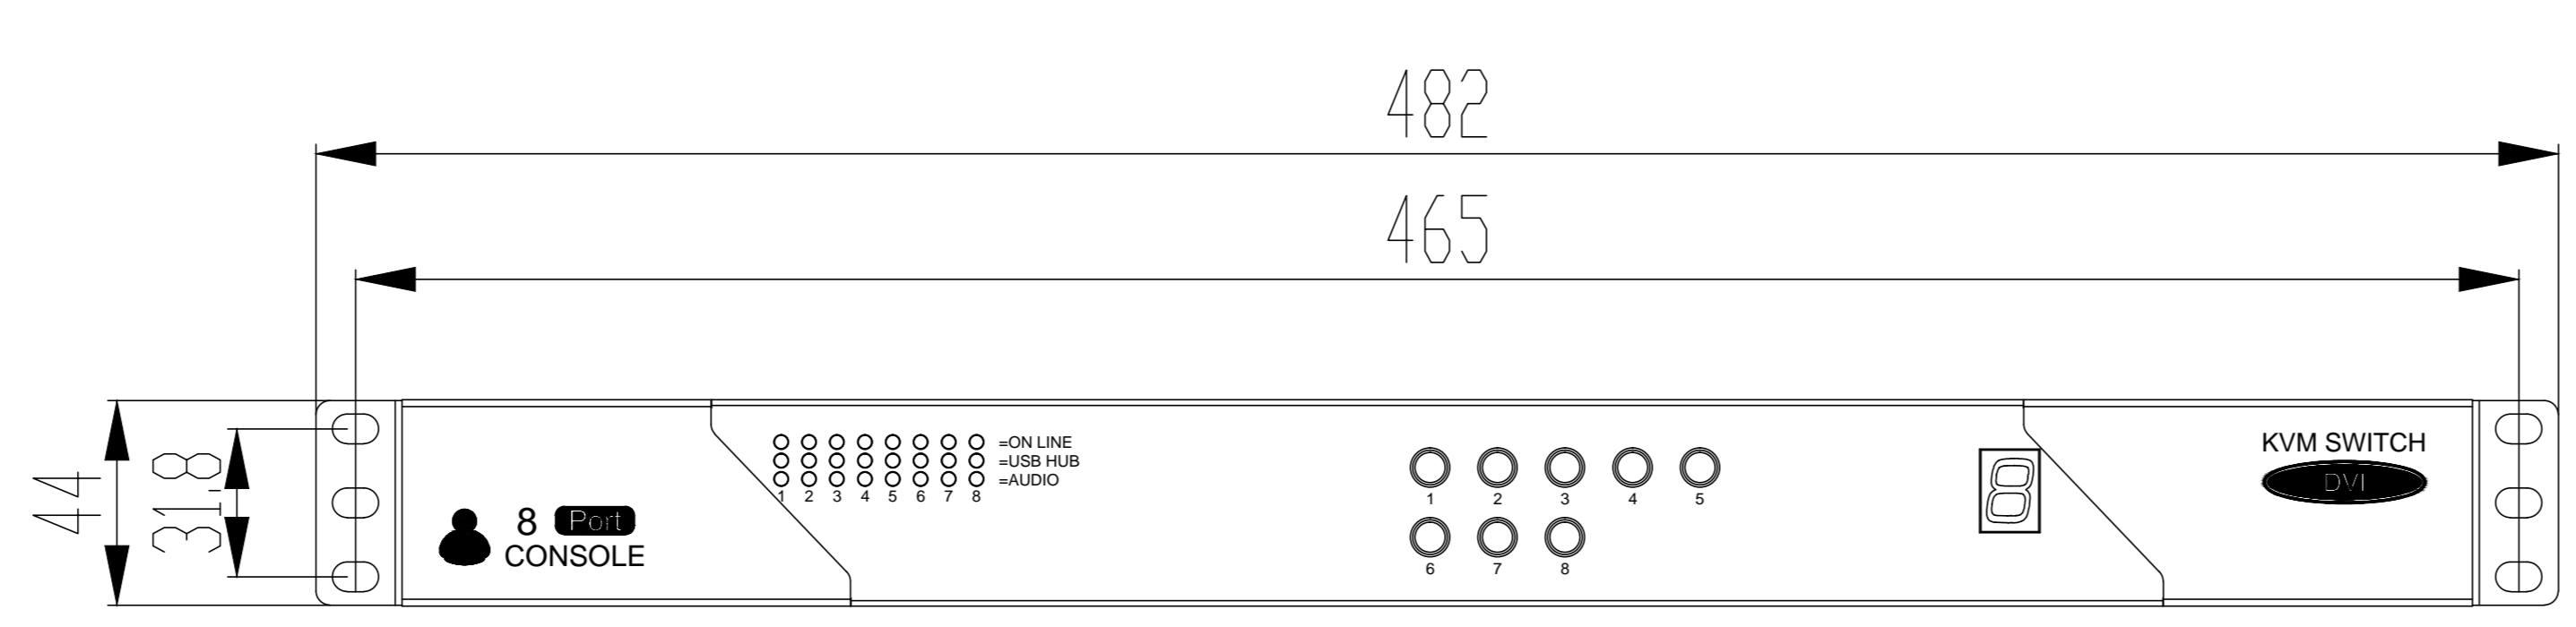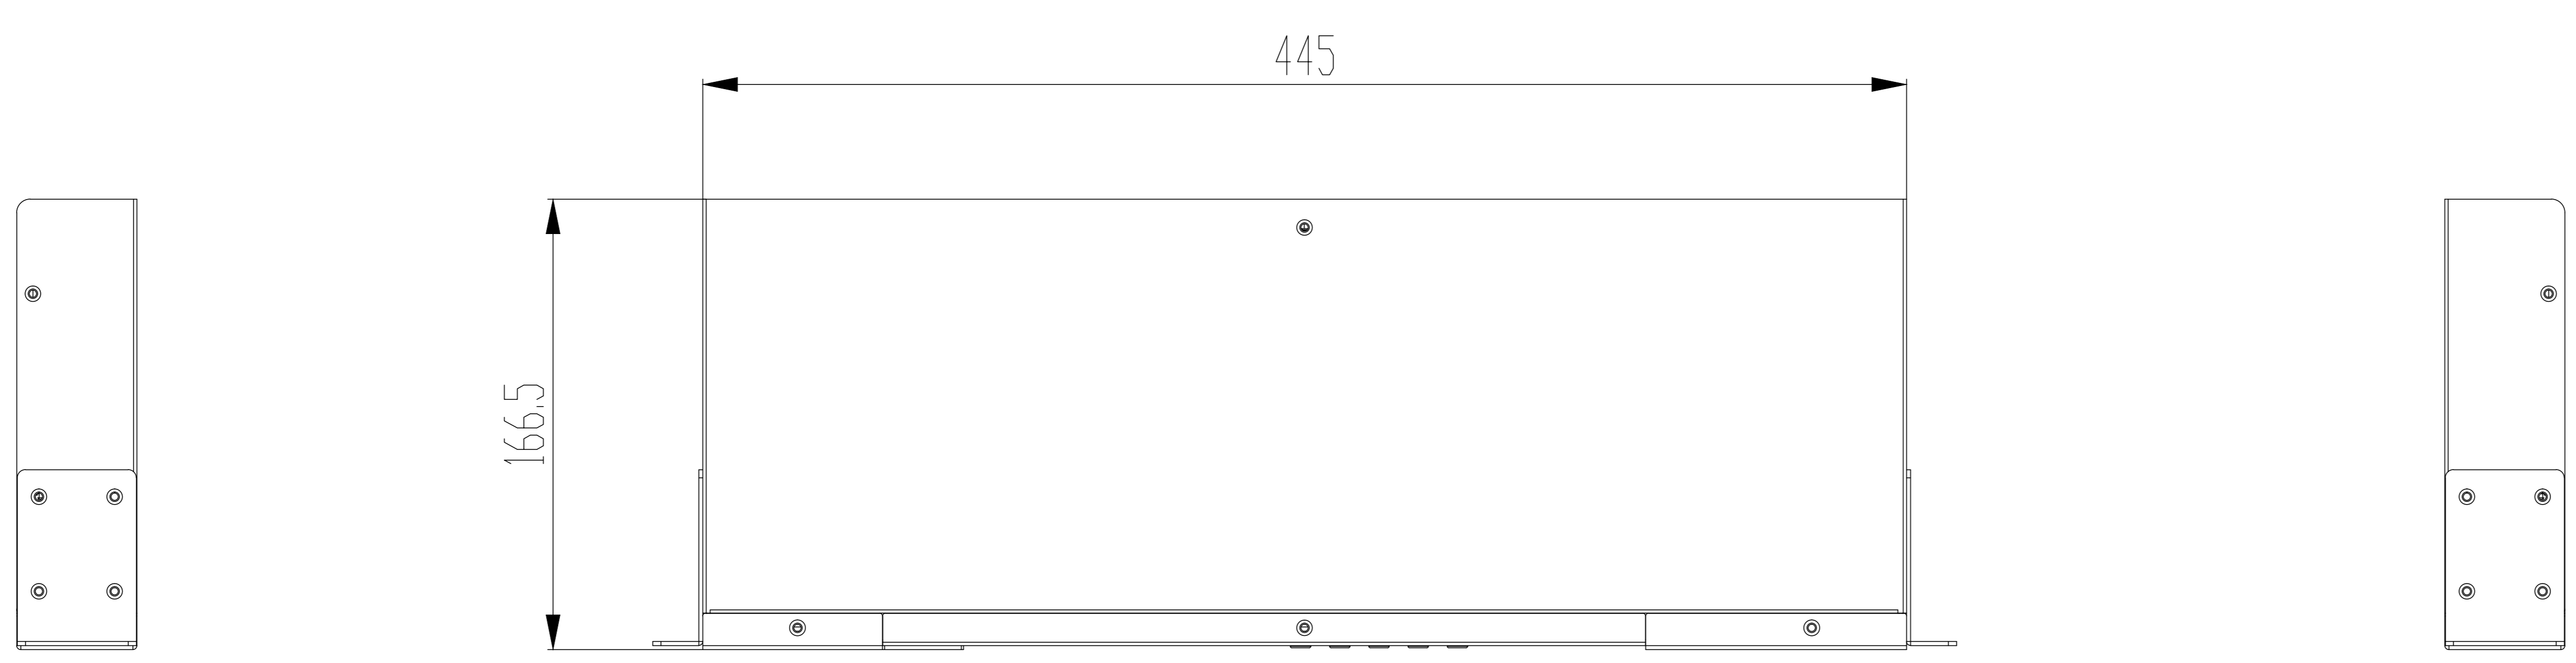

注意：  
 1. 所有工件必须倒毛刺 去接刀痕。  
 2. 所有线性尺寸按GB1804-M级。  
 3. Finish: Coating (Spec. See Sample)

MARK	DESCRIPTION	SING	DATE
△			
△			
△			

毛边朝		1、绿色面	2、白色面									
TOL	< 30	±0.1		UNIT : mm	FINISHING	砂纹黑		PART NO.	***		Ver.	A0
	30 < 120	±0.15		3RD ANGLE'S	MATERIAL		MOLD NO.	KDC-108		Q'ty	1	
	120 < 315	±0.2						TITLE		KDC-108-303V		
	315 <	±0.3		APPROVED								
ANGLE TOL	±0.5°		CHECKED									
				DESIGNED	LCH	2017-03-22	DRAWING NO.				△	
				DRAWN			SIZE	A3	SCALE	0.25	SHEET: 1 OF 1	