



Dual Screen LCD Console Drawers

Optimize rack space. Maximize rack monitoring

Dual Rail version



DVI-D-USB & VGA-USB, Audio, Hub

Features

- 2U Dual 24-inch widescreen LCD Console Drawer
- Dual DVI & VGA Port
- 1920 x 1080 Ultra high resolution
- Support FHD with 1080p resolution.
- Dual rail design, capable the LCD screen and keyboard tray Operated independently.
- Front 1xUSB, Rear 2xUSB 2.0 Type A, Sharing USB peripheral Device for computer (ex, flash disk, hard driver, KB/Mouse)
- 104-key keyboard with touch pad mouse.
- USB 2.0 Keyboard & Mouse
- Build in 2x 2 watts speakers

Options

- Composite Video input
- HDMI or Display Port input
- 3G / HD / SD –SDI Broadcast grade input
- 48V, 24V or 12V DC Power
- AR glass
- Touch screen

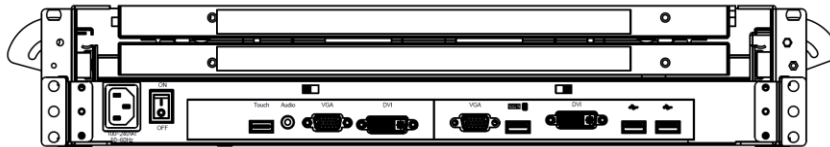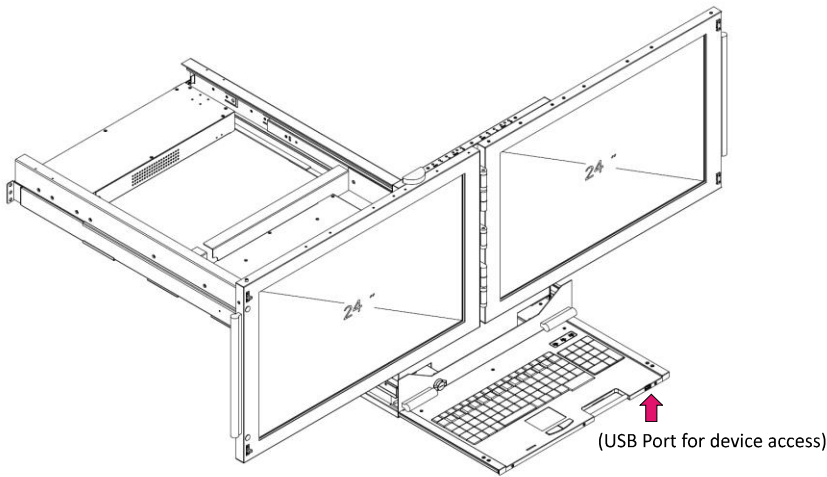

Rear of KVMD-2401W-D2

Part No.		KVMD-2401W-D2
No. of ports		1
KVM Connectors		2 x DVI-D & 2x VGA / 1 x USB for KB & Mouse / 1x Audio
LCD	Size	Dual 24-inch FULL HD display
	Backlight	LED
	Resolution	1920*1080 (support resolution up to 1920*1200)
	Max.color	16.7M
	Luminance	350 cd/m2
	View Angel (H/V)	170 / 160
	Contrast Ratio	1000 : 1
Port Selection		N/A
USB HUB		Yes , Front x1 & Rear x 2 USB 2.0 Type A for USB Peripheral Device
Audio		1 x 3.5mm Audio jack
KB/Mouse Emulation		USB 2.0
Rack Depth (rack cabinet front rails to rear rails)		24"~43" (rack cabinet front rails to rear rails)
Power		100-240V AC 50/60Hz via IEC Type power cord
Environment		Operation temp: 0 to 50°C Storage temp: -20 to 60°C Humidity: 10% - 90%, non-condensing Shock: 10G acceleration (11ms duration) Vibration: 17 to 500Hz 1G PTP
Physical Dimensions (W x H x D) / Net Weights (KGs)		443 x 88 x 762 mm
Packing Dimensions (W x H x D) / Gross weights (KGs)		

Accessory

KVMD-2401W-D2 1.8meter IEC Type Power Cord x1, 1.8meter DVI Cable x2 , 1.8meter VGA Cable x2 , 1.8meter USB Cable x1 ,1.8meter Audio Cable x1