



FAST ANALOG PCMCIA VIDEO CAPTURE CARD



VCE-PRO
VCE-PRO-F
VCE-PRO-C

Features

- PCMCIA Cardbus interface
- Small form factor PCMCIA Type II
- Intelligent scatter/gather DMA for fast, efficient use of PCI bus bandwidth
- On-board memory for fast image acquisition
- NTSC/PAL/SECAM/RS170 compliant

With Imperx **PCMCIA frame grabbers**, applications and uses of portable and mobile vision systems are becoming a reality. The **VCE-PRO** supports any standard analog video interface and provides the functionality, performance and versatility required by today's most demanding vision systems. The cards feature plug-n-play operation with hot insertion/removal and include intelligent scatter/gather DMA engines with a generous supply of on-board memory. A full software suite including drivers and application is provided. SDK available.

Applications

- Industrial
 - Silicon wafer and PCB inspection
 - Machine vision
 - Document scanning
- Medical
 - Ultrasound
 - X-Ray, CT and MRI
- Security
 - Police in-car surveillance
 - Biometric identification
- Military
 - Aerial mapping/survey
 - Battlefield imaging
 - UAV, Robotic vision

MOBILITY...CONVENIENCE...PERFORMANCE...
PCMCIA FRAME GRABBERS

Specifications for VCE-PRO

Features

PCMCIA Cardbus 8.0 compliant
32-bit bus operating at 33 MHz
Intelligent scatter/gather DMA
256 Mbits onboard memory (two banks)
Plug-and-play with hot insertion and removal
Fast video capture – up to 30 fps
Selectable window sizes
Adjustable brightness, contrast, hue and saturation
Captures single, multiple frames or AVI clips
Normal or delay capture
Date, time and text overlay
BMP or adjustable JPEG file format
Image viewer with DVR Controls
External trigger input
16-bit YCrCb (4:2:2) digital output

Video Source

2 Composite or 2 S Video inputs
NTSC, PAL (B,D,G,H,I,M,N), SECAM and RS170
Auto NTSC/PAL format detection
Automatic gain control

Environmental

Operating temperature: 0°C to 65°C
Relative humidity: 90% non-condensing

Mechanical

PCMCIA Type II card
VCE-PRO – 4.5" x 2.1" x 0.2", (115 x 54 x 5) mm
VCE-PRO-F – 3.3" x 2.1" x 0.2", (85 x 54 x 5) mm
Weight 1.25 oz, (35 g)


Description

The VCE-PRO is a professional, fast, state of the art PCMCIA CardBus Video Capture Card, allowing users to display, capture, store, and preview full motion video on their notebook computers. The VCE-PRO is capable of capturing single or multiple frames, and standard AVI clips from any NTSC, PAL, SECAM or RS170 video source. A built in capture delay function enables users to program their card to record sequences of events at later dates and times. An external triggering option allows for easy implementation of the card into demanding machine vision environments. Each captured frame can be stamped with a user message along with the date and time of capture. A specially designed image viewer gives users the flexibility to view, scroll or step through the recorded images.

Power Requirements

- 3.3V DC +/- 5%
- 160 mA steady, 350 mA inrush
- 0.5W constant power

Mechanical Dimensions

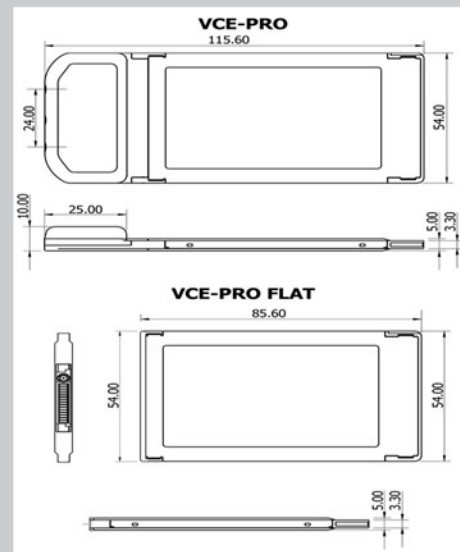

Ordering Information


Ordering Standard: **VCE-PRO**

Ordering Flat: **VCE-PRO-F**

Ordering Custom: **VCE-PRO-C1BM010**

Number of Inputs	Cable Length
1 - Single Video Input (composite)	010 - 10 cm
2 - Dual Video Input (composite)	050 - 50 cm
3 - Single Video Input and Trigger	100 - 100 cm
	xxx - User Defined
Connector Type	Connector Gender
B - BNC	S - SMA
R - RCA	V - S Video
	M - Male
	F - Female

Software

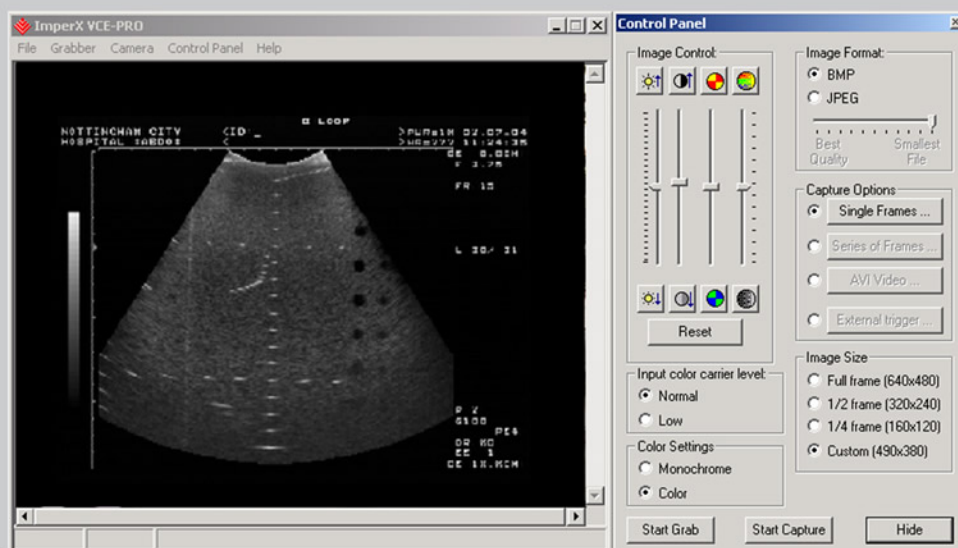

- Windows 2000 and Windows XP drivers
- Twain, WDM, DirectX and LabView drivers
- DLL based SDK (C++, VB examples)
- Image viewer (GUI) application

For specific details and ordering information, consult the product user's manual or contact us at sales@imperx.com.

Copyright © 2004, Imperx, Inc. Product information subject to change without notice.

Rev. 1.0, 11/08/04



Imperx Incorporated • 6421 Congress Avenue • Boca Raton, FL 33487 • USA
Phone: 1-561-989-0006 • 1-866-849-1662 • Fax: 1-561-989-0045
www.imperx.com • sales@imperx.com

Made in USA

