

1U 17" widescreen Full HD 1920 x 1080 LCD console drawer with VGA, DVI-D and HDMI w/ speaker, w/ 104 key notepad keyboard w/ touch pad (e), 6ft long DVI +USB+ Audio KVM Cables. 18.9" Deep only and 35lbs

(Model: NW117HDe)



NW117HD-S8 / NW117HD-S16



LCD Drawer & KVM Benefits

- 1U 17" widescreen LCD console drawer with VGA and DVI-D
- Support Full HD with 1080p resolution
- 104-key keyboard with either touchpad or trackball
- SUN Micro or MAC keyboard options available
- New enhanced aesthetics with molded front handle
- Short depth design of 480mm (18.9") only
- Front USB port for device access (USB Hub KVM only)
- 2 post rack mounting available

Drawer Features & Options

- 3G / HD / SD-SDI Broadcast-grade input (w/ speaker)
- HDMI (w/ speaker) or Audio input
- DC power : 12V / 24V / 48V / 110 ~ 125V

| | |
|---------------------------|-------------------------------------|
| LCD Panel | |
| Diagonal size | 17.3" widescreen TFT |
| Max. Resolution | 1920 x 1080 |
| Brightness (cd/m2) | 400 |
| Backlight | LED |
| Colors | 16.7 M, 8-bit |
| Contrast Ratio (typ) | 600 : 1 |
| Viewing Angle (H/V) | 160° x 140° |
| Active area (mm) | 382 x 215 |
| MTBF (hrs) | 50,000 |
| Signal input | VGA or DVI-D |
| Speaker | Built-in Dual Stereo |
| (Option) | Speakers 2W x 2 |
| Casing Color | Black (PAL 9005) |
| Weight (Single console) | |
| Net | 10.8 kgs (24 lbs) |
| Gross | 15.8 kgs (34.8 lbs) |
| Environmental | |
| Operating | 0 to 55°C Degree |
| Storage | -5 to 60°C Degree |
| Relative humidity | 5-90%, non-condensing |
| Shock | 10G acceleration (11 ms duration) |
| Vibration | 5-500Hz 1G RMS random vibration |
| Regulatory | |
| Safety | FCC & CE certified |
| Environmental | RoHS2 & REACH compliant |

| | |
|---------------------------------------|---|
| Power | |
| Input | Auto-sensing 100 to 240VAC, 50 / 60Hz |
| Consumption | Max. 48 Watt, Standby 5 Watt |
| Product Dimensions (Single console) | |
| Product | 441.6 x 480 x 44 mm / 17.4 x 18.9 x 1.73 inch |
| Packing | 590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch |

Console Cable

CV-6

6 feet DVI-D console cable (bundle)

- DVI-D + USB, server end
- DVI-D + DB15 (USB KB & MS), console port □



NB-6

6 feet VGA console cable (alternative)


- VGA + USB, server end
- DB15 (VGA, USB KB & MS), console port □

Standard Keyboard

Ge G keyboard integrated with touchpad

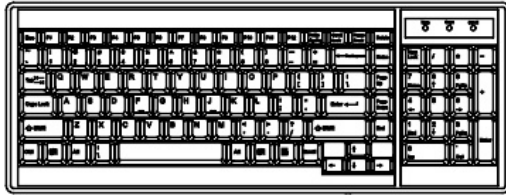

Gb G keyboard integrated with trackball

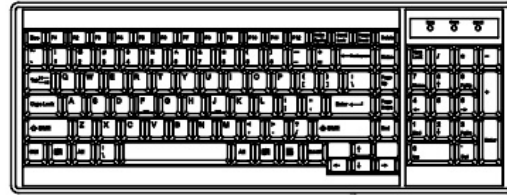

Supporting layouts

| | | | | | |
|---------|----------------|---------|-------------|-------------|----------|
| America | | | | | |
| | United States | | | | |
| EMEA | | | | | |
| | United Kingdom | Germany | France | Spain | Norway |
| | | | | | |
| | Italy | Russia | Switzerland | Netherlands | Portugal |
| Asia | | | | | |
| | China | Japan | Korea | Arabia | Turkey |

Keyboard Options

* US layout only

Me Mac keyboard with touchpad



Se S keyboard with touchpad

Mb Mac keyboard with trackball

Sb S keyboard with trackball



KVM Selection

(X) Stands for 17" or 19" LCD size

| Matrix DB-15 KVM | Local | Remote | IP | 8-port | 16-port | 32-port |
|------------------|-------|--------|------------------|-------------------|-------------------|---------|
| | 1 | 1 | 1 | NW11XHD-S - M118 | NW11XHD-S - M1116 | - |
| | 1 | 1 | 2 | NW11XHD-S - M218 | NW11XHD-S - M2116 | - |
| | 1 | 1 | 0 | NW11XHD-S - M018 | NW11XHD-S - M0116 | - |
| | 1 | 2 | 0 | NW11XHD-S - M028 | NW11XHD-S - M0216 | - |
| 1 | 3 | 0 | NW11XHD-S - M038 | NW11XHD-S - M0316 | - | |

| Combo DB-15 KVM | Local | Remote | IP | 8-port | 16-port | 32-port |
|-----------------|-------|--------|------------------|-------------------|-------------------|---------|
| | 1 | 0 | 1 | NWIP11XHD-S - 82 | NWIP11XHD-S - 162 | - |
| | 1 | 1 | 0 | NW11XHD-S - CE8 | NW11XHD-S - CE16 | - |
| 1 | 0 | 0 | NW11XHD-S - S801 | NW11XHD-S - S1601 | - | |

Combo DB-15 KVM Cable : NE-6 / 10 / 15 (6, 10 or 15 ft)

| DVI-D KVM | Local | Remote | IP | 12-port |
|-----------|-------|--------|----|-----------------|
| | 1 | 0 | 0 | NW11XHD-S - D12 |

DVI-D KVM Cable : NC-6 / 15 (6 or 15 ft)

| USB Hub DB-15 KVM | Local | Remote | IP | 8-port | 16-port | 32-port |
|-------------------|-------|--------|------------------|-------------------|--------------------|---------|
| | 1 | 0 | 1 | NWIP11XHD-S - 82H | NWIP11XHD-S - 162H | - |
| | 1 | 1 | 0 | NW11XHD-S - CE8H | NW11XHD-S - CE16H | - |
| 1 | 0 | 0 | NW11XHD-S - 801H | NW11XHD-S - 1601H | - | |


USB KVM Cable : NB-6 / 10 / 15 (6, 10 or 15 ft)

Mechanical Drawing

Front View




Side View



UNIT : mm
1mm = 0.03937 inch

Top View

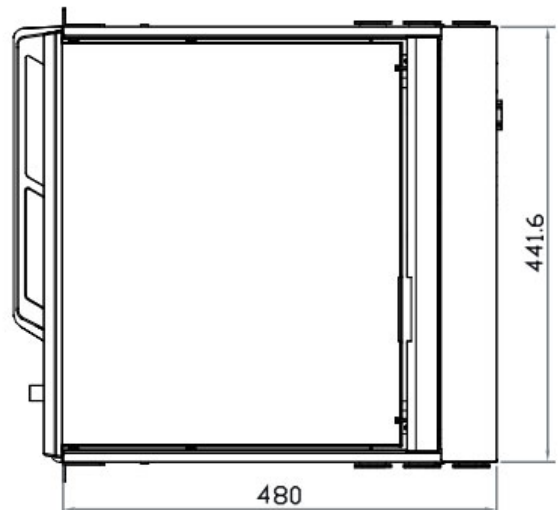

Model: NW117HD-S8e

